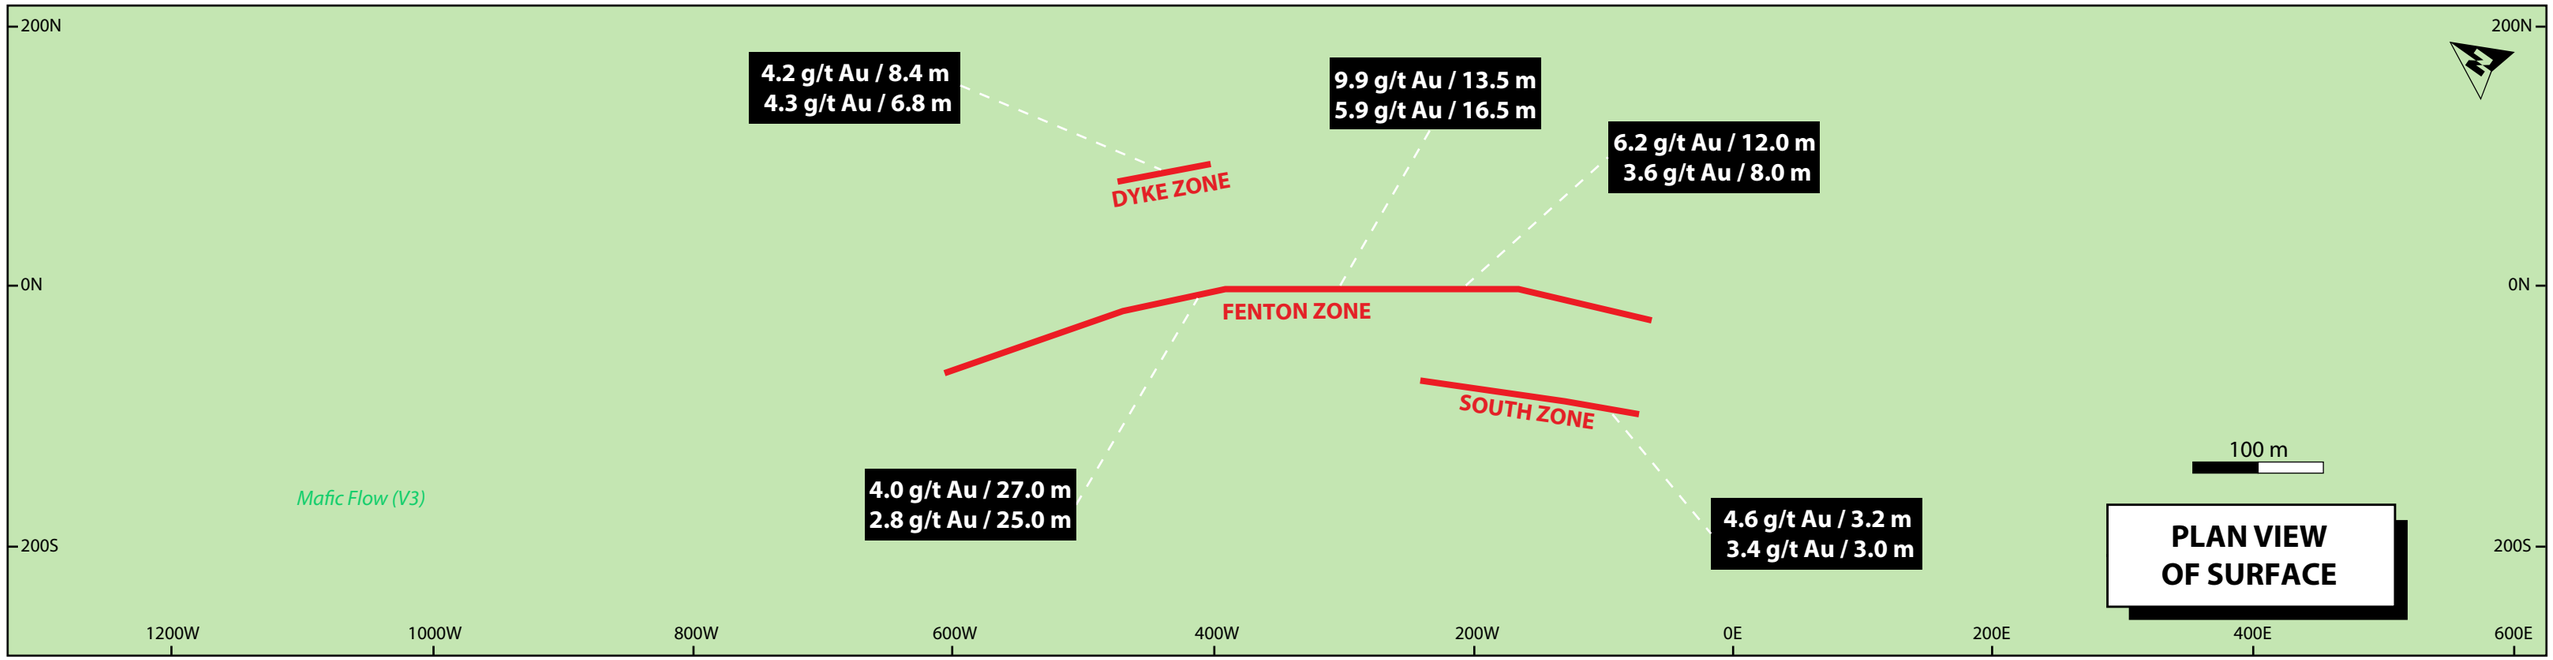
200N
0N
200S
4.2 g/t Au / 8.4 m
4.3 g/t Au / 6.8 m
9.9 g/t Au / 13.5 m
5.9 g/t Au / 16.5 m
6.2 g/t Au / 12.0 m
3.6 g/t Au / 8.0 m
DYKE ZONE
FENTON ZONE
SOUTH ZONE
Mafic Flow (V3)
4.0 g/t Au / 27.0 m
2.8 g/t Au / 25.0 m
4.6 g/t Au / 3.2 m
3.4 g/t Au / 3.0 m
100 m
PLAN VIEW
OF SURFACE
1200W
1000W
800W
600W
400W
200W
0E
200E
400E
600E

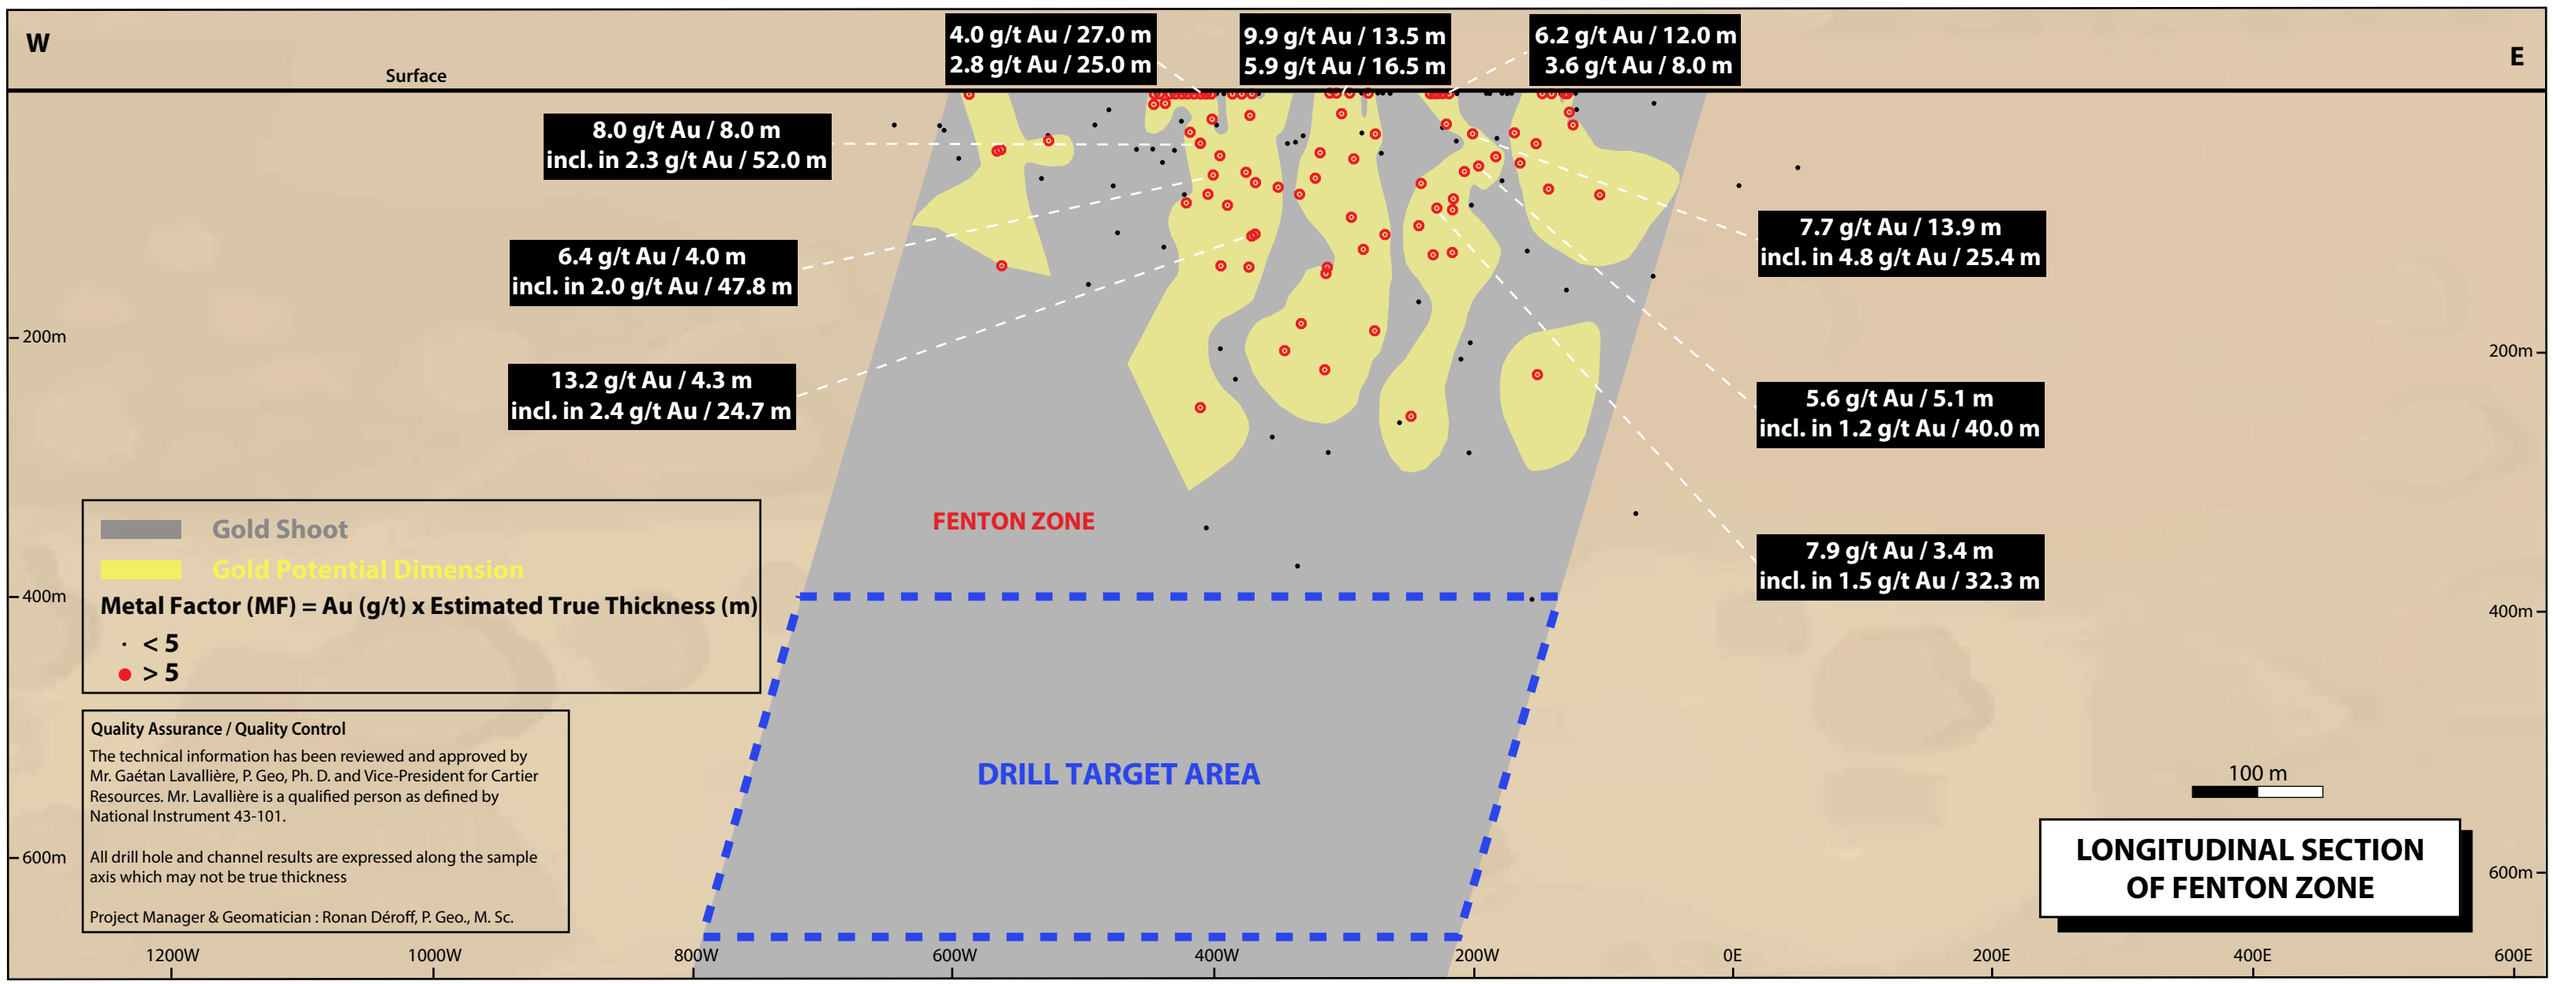
W
E
Surface
4.0 g/t Au / 27.0 m
2.8 g/t Au / 25.0 m
9.9 g/t Au / 13.5 m
5.9 g/t Au / 16.5 m
6.2 g/t Au / 12.0 m
3.6 g/t Au / 8.0 m
8.0 g/t Au / 8.0 m
incl. in 2.3 g/t Au / 52.0 m
6.4 g/t Au / 4.0 m
incl. in 2.0 g/t Au / 47.8 m
13.2 g/t Au / 4.3 m
incl. in 2.4 g/t Au / 24.7 m
7.7 g/t Au / 13.9 m
incl. in 4.8 g/t Au / 25.4 m
5.6 g/t Au / 5.1 m
incl. in 1.2 g/t Au / 40.0 m
7.9 g/t Au / 3.4 m
incl. in 1.5 g/t Au / 32.3 m
FENTON ZONE
DRILL TARGET AREA
200m
400m
600m
Gold Shoot
Gold Potential Dimension
Metal Factor (MF) = Au (g/t) x Estimated True Thickness (m)
< 5
> 5
Quality Assurance / Quality Control
The technical information has been reviewed and approved by Mr. Gaétan Lavallière, P. Geo, Ph. D. and Vice-President for Cartier Resources. Mr. Lavallière is a qualified person as defined by National Instrument 43-101.
All drill hole and channel results are expressed along the sample axis which may not be true thickness
Project Manager & Geomatician : Ronan Déroff, P. Geo., M. Sc.
100 m
LONGITUDINAL SECTION
OF FENTON ZONE
1200W
1000W
800W
600W
400W
200W
0E
200E
400E
600E