


W

E

3 Zone Longitudinal Section (Looking North) CHIMO MINE PROJECT

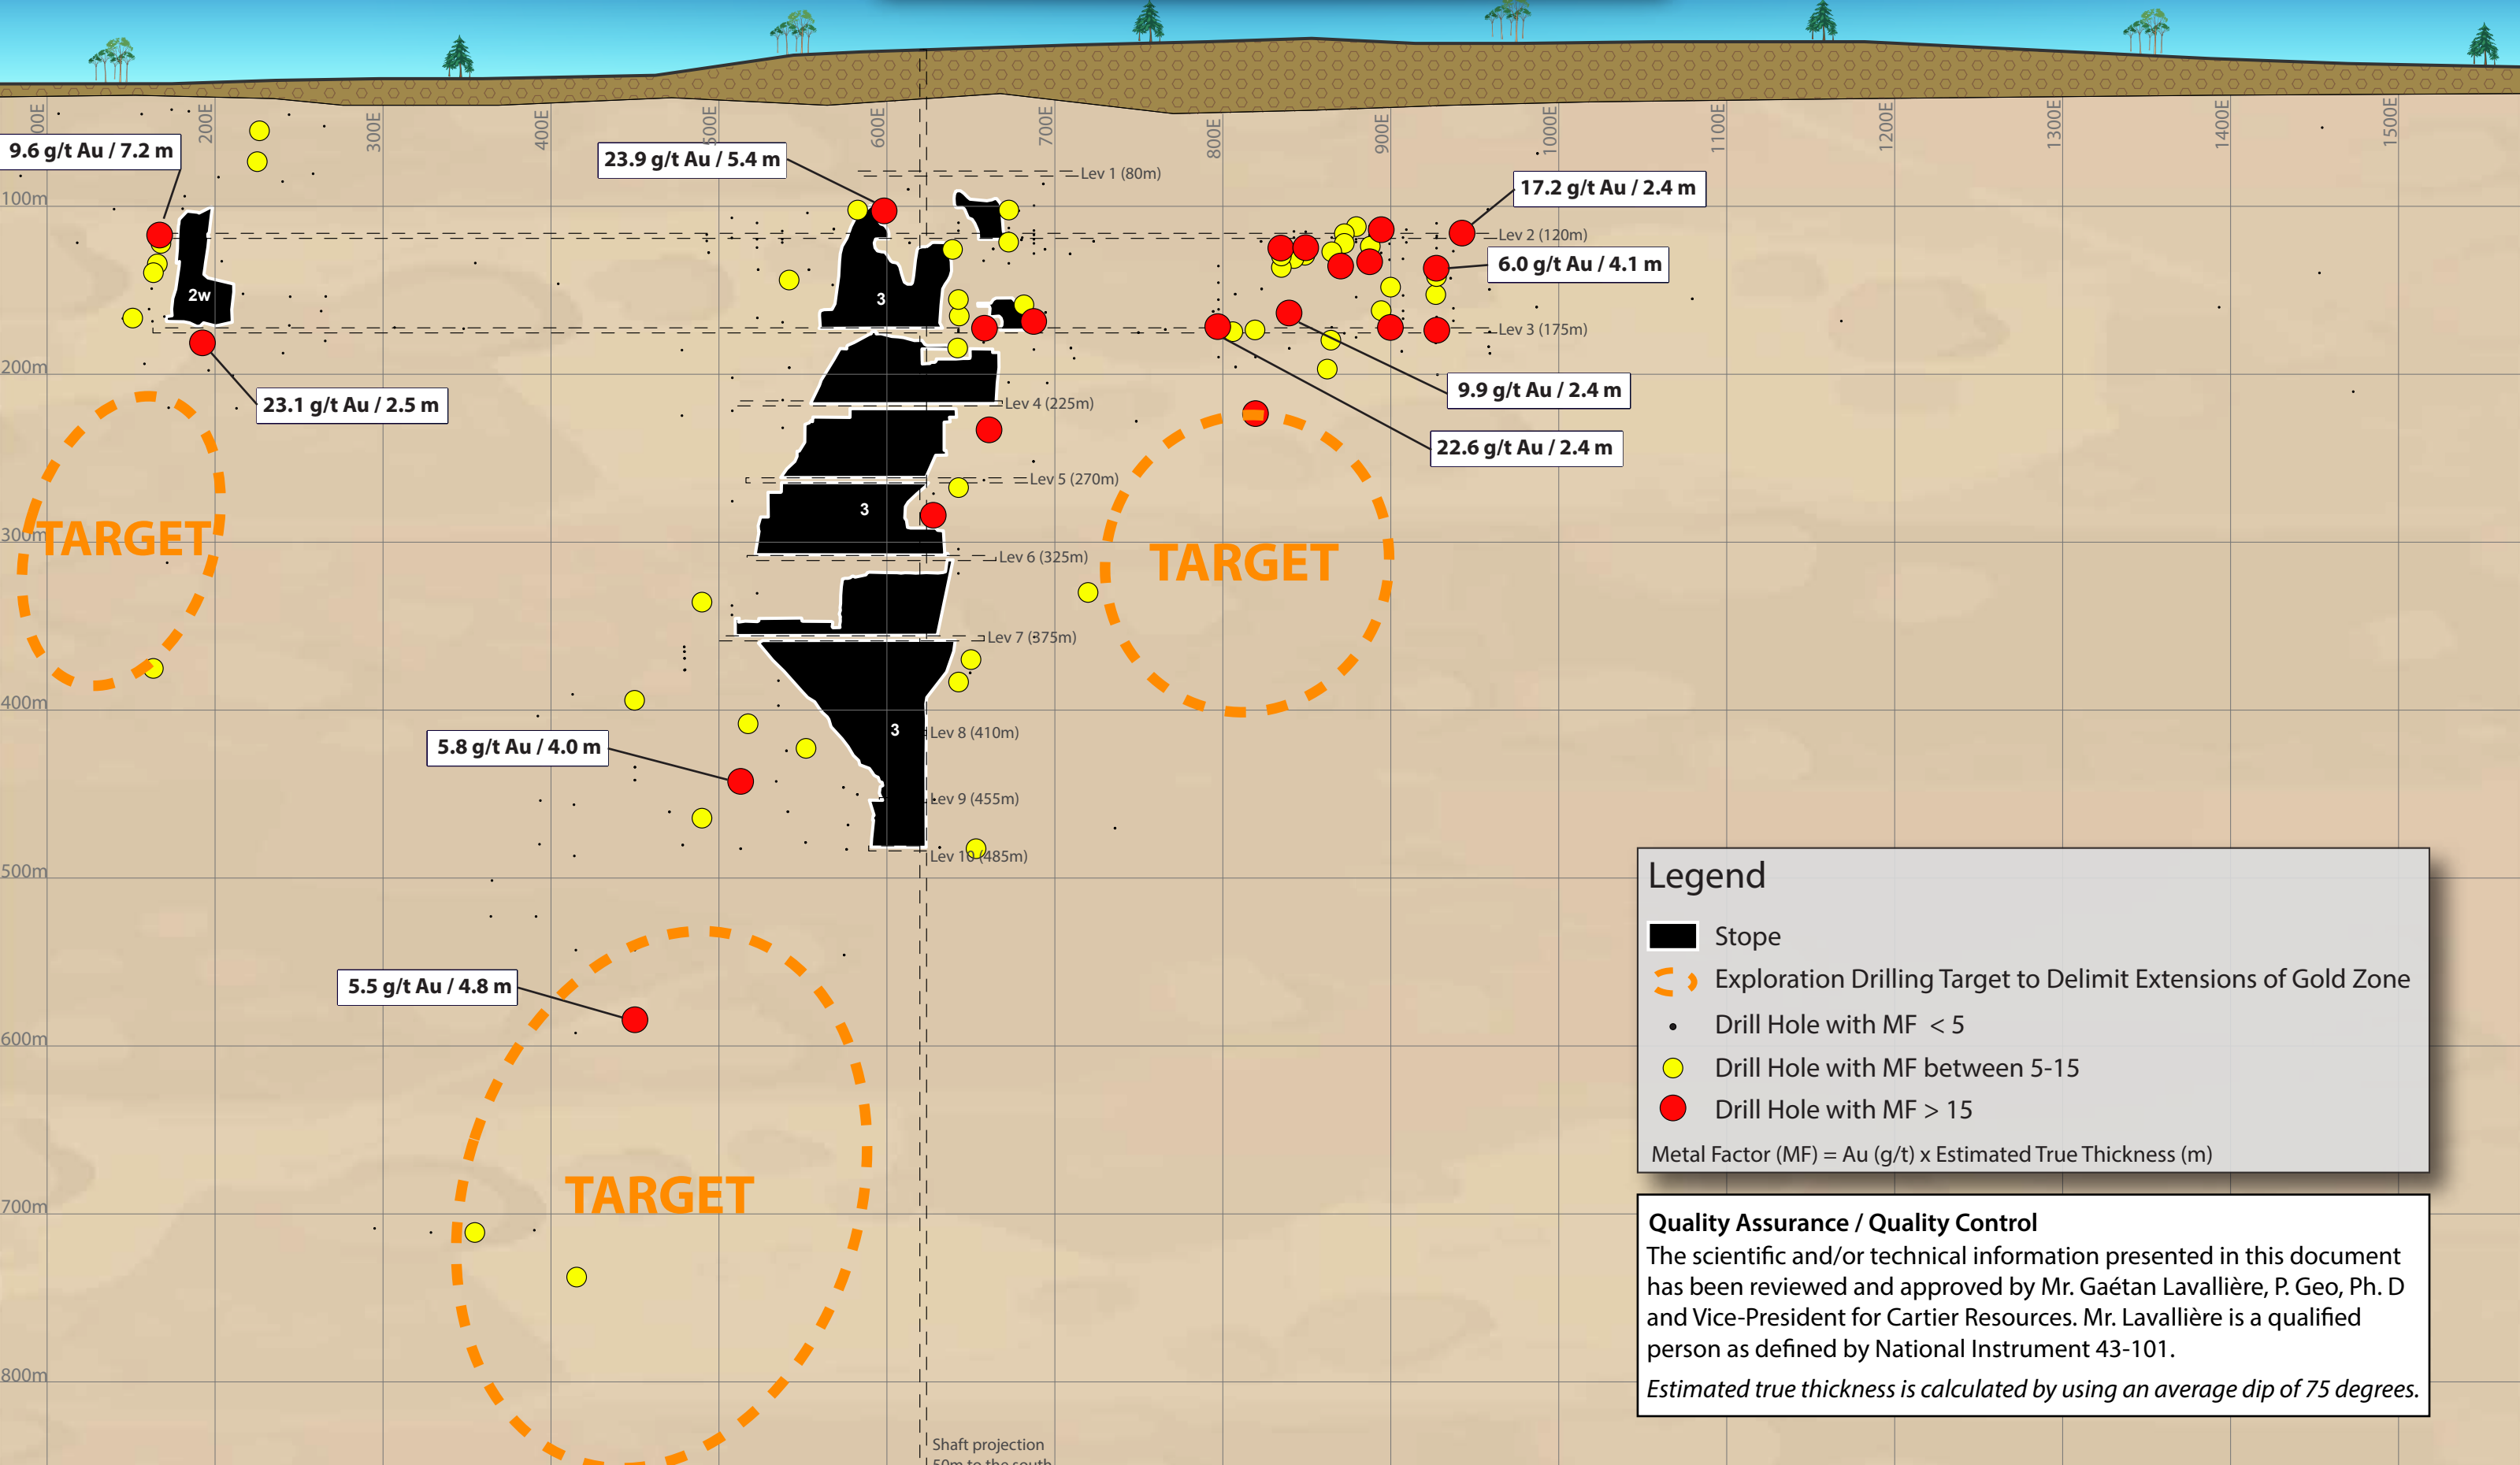

9.6 g/t Au / 7.2 m

23.9 g/t Au / 5.4 m

17.2 g/t Au / 2.4 m

6.0 g/t Au / 4.1 m

23.1 g/t Au / 2.5 m

9.9 g/t Au / 2.4 m

22.6 g/t Au / 2.4 m

5.8 g/t Au / 4.0 m

5.5 g/t Au / 4.8 m

Shaft projection
50m to the south

Legend

- Stope
- Exploration Drilling Target to Delimit Extensions of Gold Zone
- Drill Hole with MF < 5
- Drill Hole with MF between 5-15
- Drill Hole with MF > 15

Metal Factor (MF) = Au (g/t) x Estimated True Thickness (m)

Quality Assurance / Quality Control
 The scientific and/or technical information presented in this document has been reviewed and approved by Mr. Gaétan Lavallière, P. Geo, Ph. D and Vice-President for Cartier Resources. Mr. Lavallière is a qualified person as defined by National Instrument 43-101.
Estimated true thickness is calculated by using an average dip of 75 degrees.