


W

E

# 6 Zone Longitudinal Section (Looking North) CHIMO MINE PROJECT

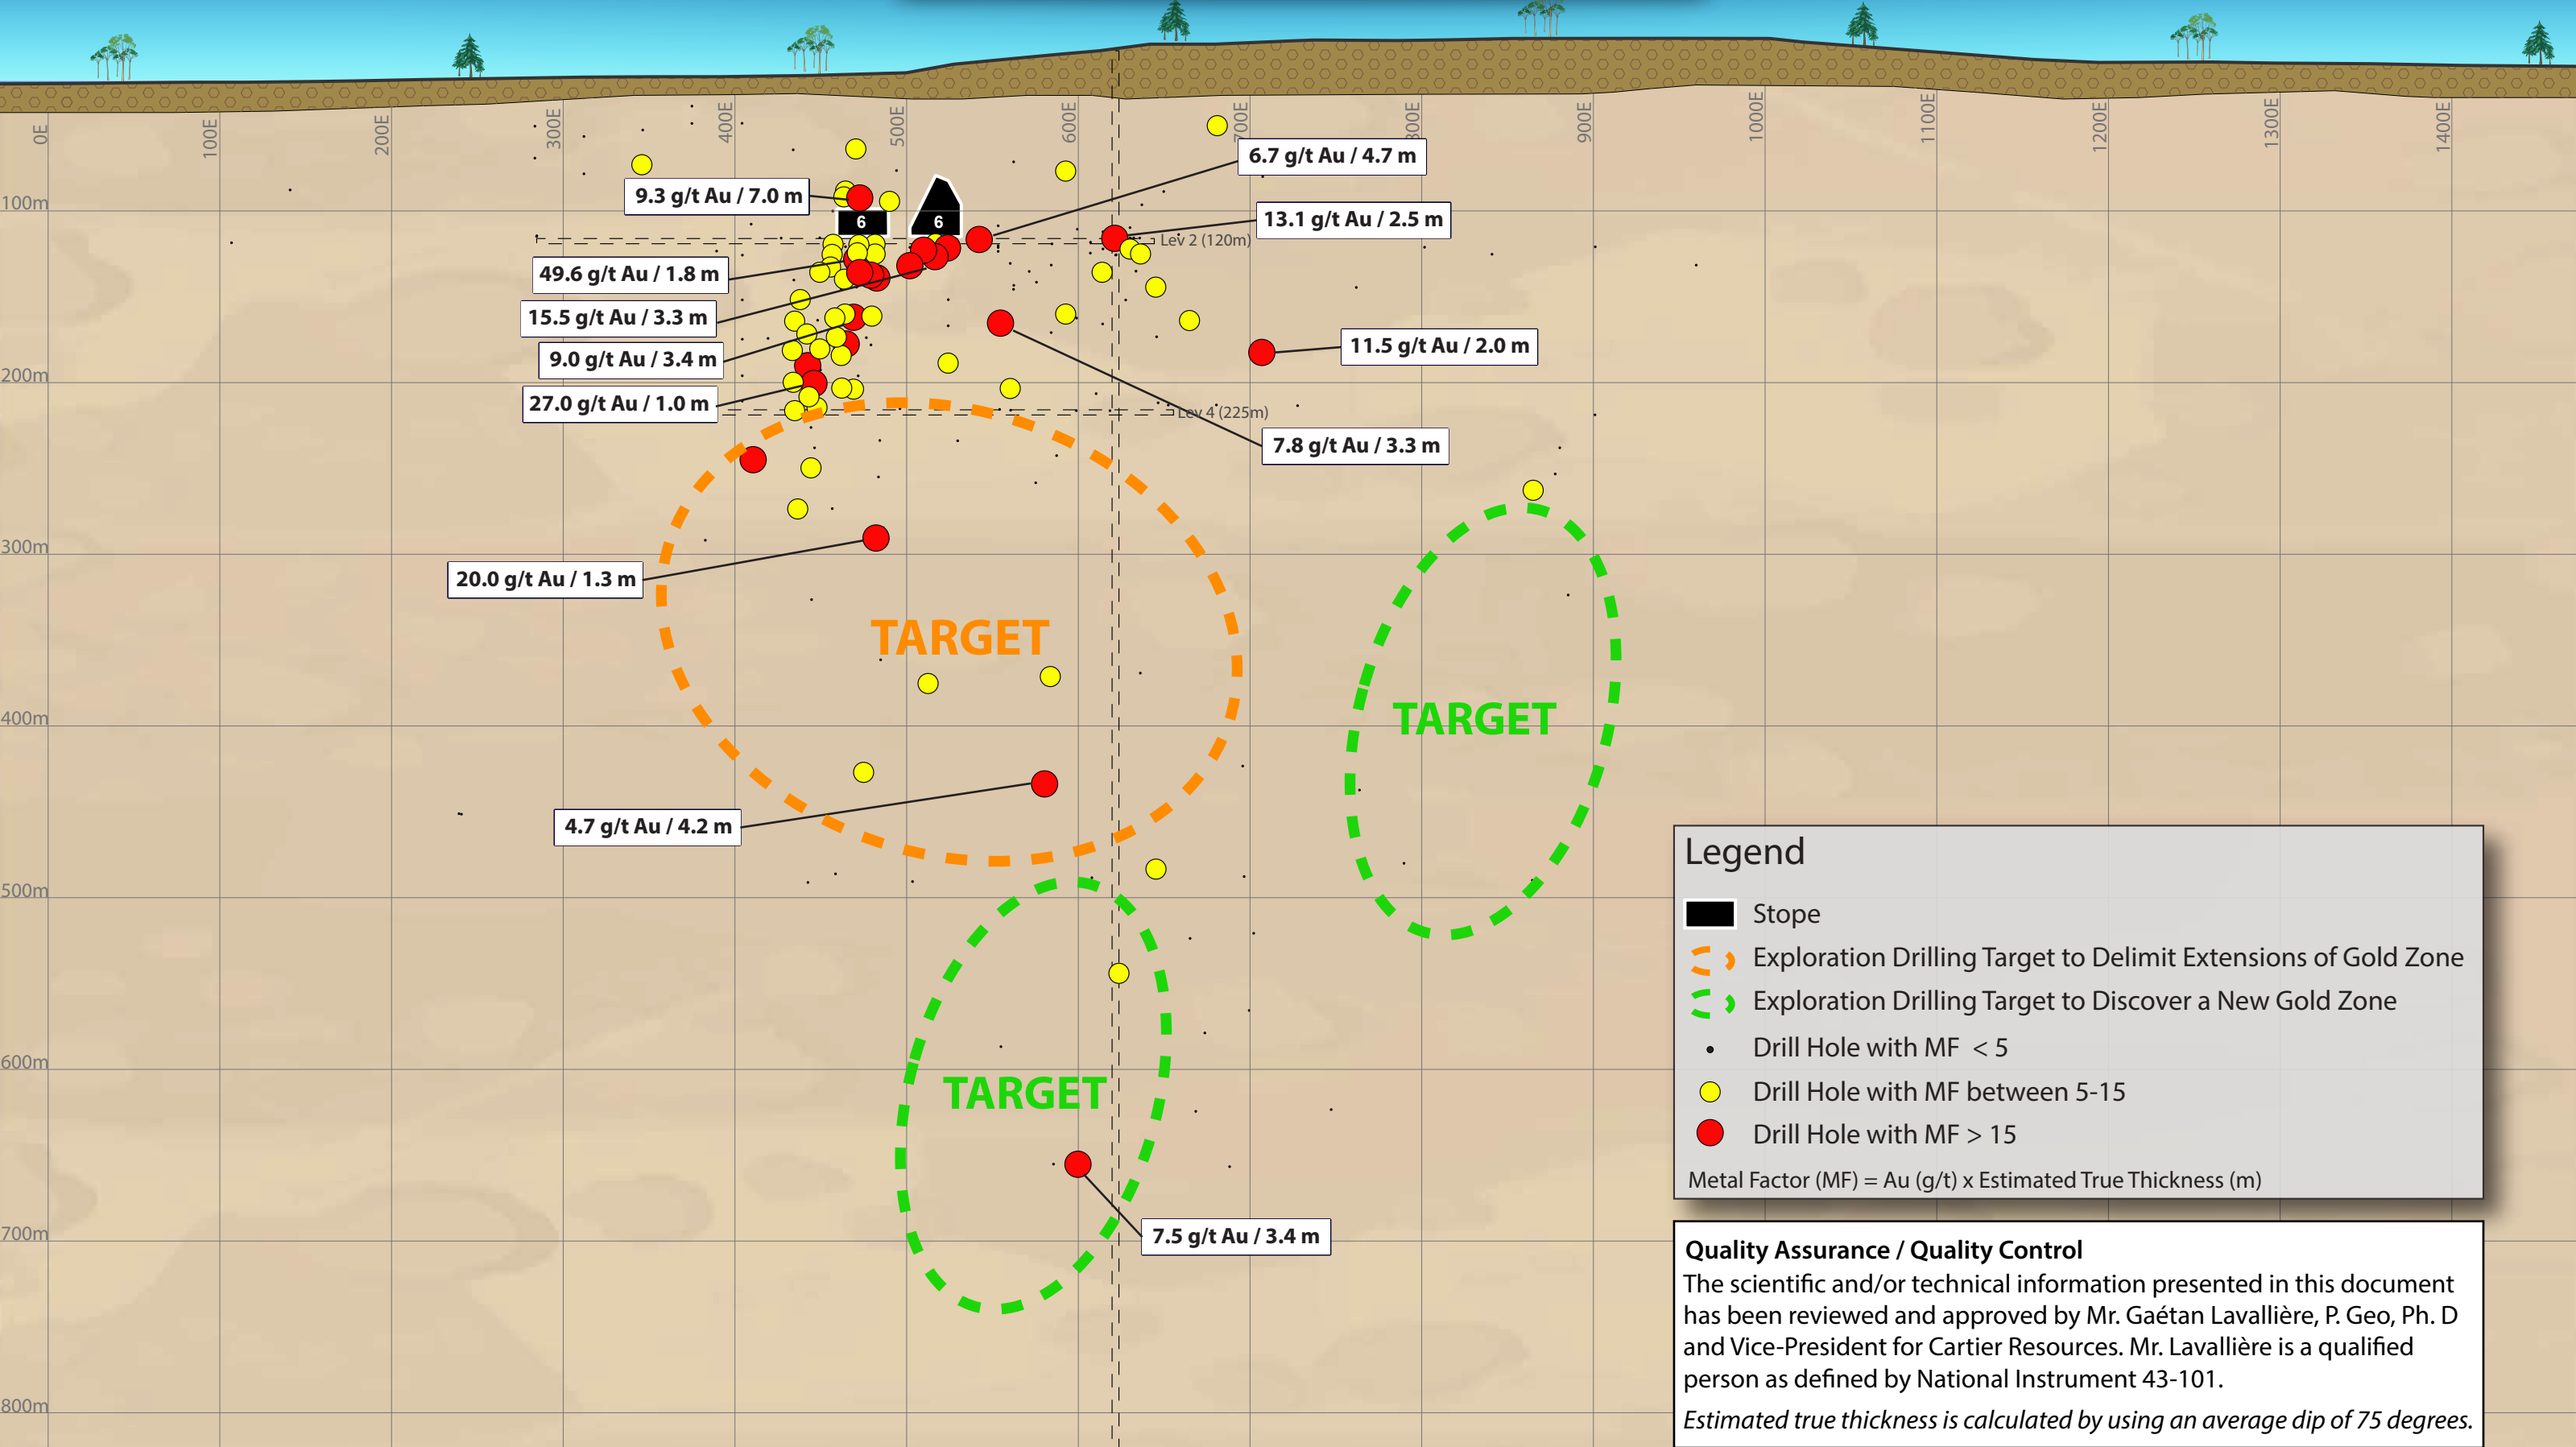

9.3 g/t Au / 7.0 m

49.6 g/t Au / 1.8 m

15.5 g/t Au / 3.3 m

9.0 g/t Au / 3.4 m

27.0 g/t Au / 1.0 m

20.0 g/t Au / 1.3 m

4.7 g/t Au / 4.2 m

6.7 g/t Au / 4.7 m

13.1 g/t Au / 2.5 m

11.5 g/t Au / 2.0 m

7.8 g/t Au / 3.3 m

7.5 g/t Au / 3.4 m

TARGET

TARGET

TARGET

Shaft projection  
450m to the north

### Legend

- Stope
  - Exploration Drilling Target to Delimit Extensions of Gold Zone
  - Exploration Drilling Target to Discover a New Gold Zone
  - Drill Hole with MF < 5
  - Drill Hole with MF between 5-15
  - Drill Hole with MF > 15
- Metal Factor (MF) = Au (g/t) x Estimated True Thickness (m)

### Quality Assurance / Quality Control

The scientific and/or technical information presented in this document has been reviewed and approved by Mr. Gaétan Lavallière, P. Geo, Ph. D and Vice-President for Cartier Resources. Mr. Lavallière is a qualified person as defined by National Instrument 43-101.

*Estimated true thickness is calculated by using an average dip of 75 degrees.*