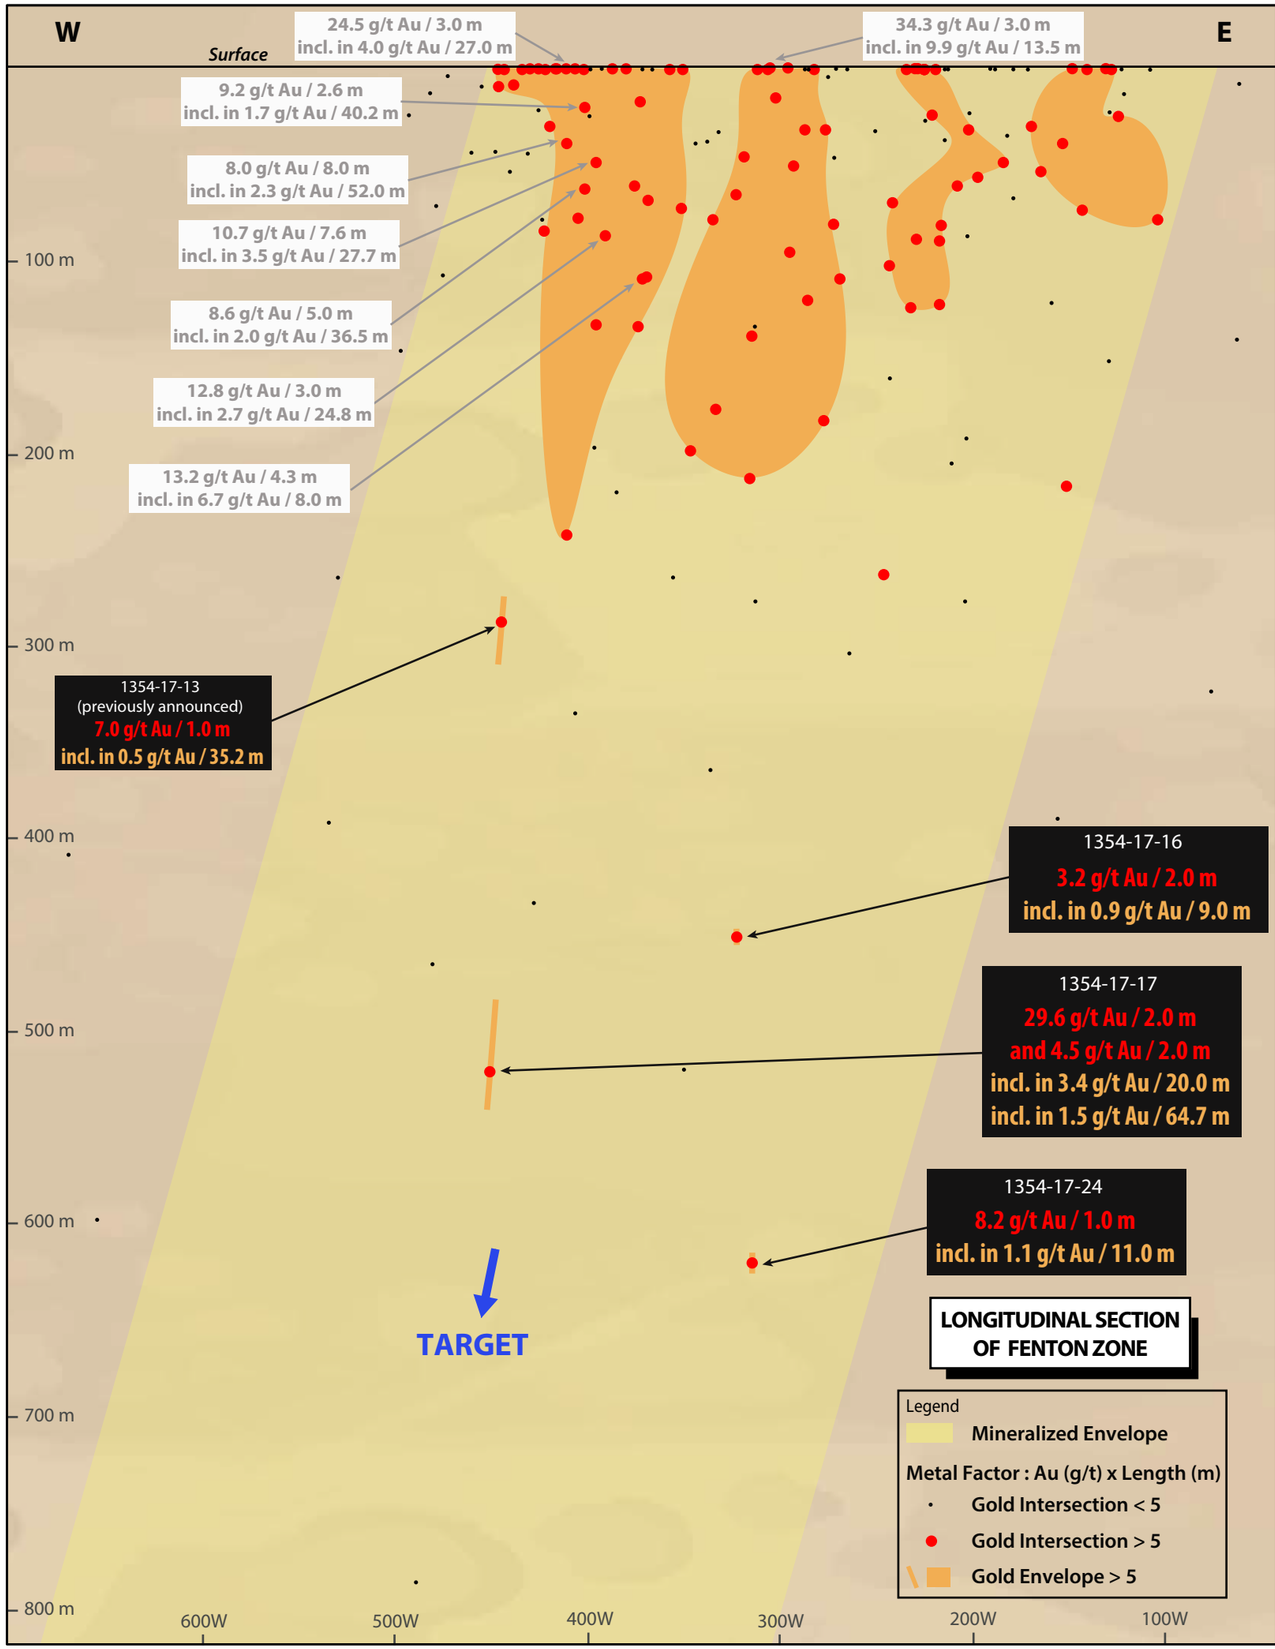
W
E
Surface
24.5 g/t Au / 3.0 m
incl. in 4.0 g/t Au / 27.0 m
34.3 g/t Au / 3.0 m
incl. in 9.9 g/t Au / 13.5 m
9.2 g/t Au / 2.6 m
incl. in 1.7 g/t Au / 40.2 m
8.0 g/t Au / 8.0 m
incl. in 2.3 g/t Au / 52.0 m
10.7 g/t Au / 7.6 m
incl. in 3.5 g/t Au / 27.7 m
8.6 g/t Au / 5.0 m
incl. in 2.0 g/t Au / 36.5 m
12.8 g/t Au / 3.0 m
incl. in 2.7 g/t Au / 24.8 m
13.2 g/t Au / 4.3 m
incl. in 6.7 g/t Au / 8.0 m
100 m
200 m
300 m
400 m
500 m
600 m
700 m
800 m
1354-17-13
(previously announced)
7.0 g/t Au / 1.0 m
incl. in 0.5 g/t Au / 35.2 m
1354-17-16
3.2 g/t Au / 2.0 m
incl. in 0.9 g/t Au / 9.0 m
1354-17-17
29.6 g/t Au / 2.0 m
and 4.5 g/t Au / 2.0 m
incl. in 3.4 g/t Au / 20.0 m
incl. in 1.5 g/t Au / 64.7 m
1354-17-24
8.2 g/t Au / 1.0 m
incl. in 1.1 g/t Au / 11.0 m
TARGET
LONGITUDINAL SECTION
OF FENTON ZONE
Legend
Mineralized Envelope
Metal Factor : Au (g/t) x Length (m)
Gold Intersection < 5
Gold Intersection > 5
Gold Envelope > 5
600W
500W
400W
300W
200W
100W

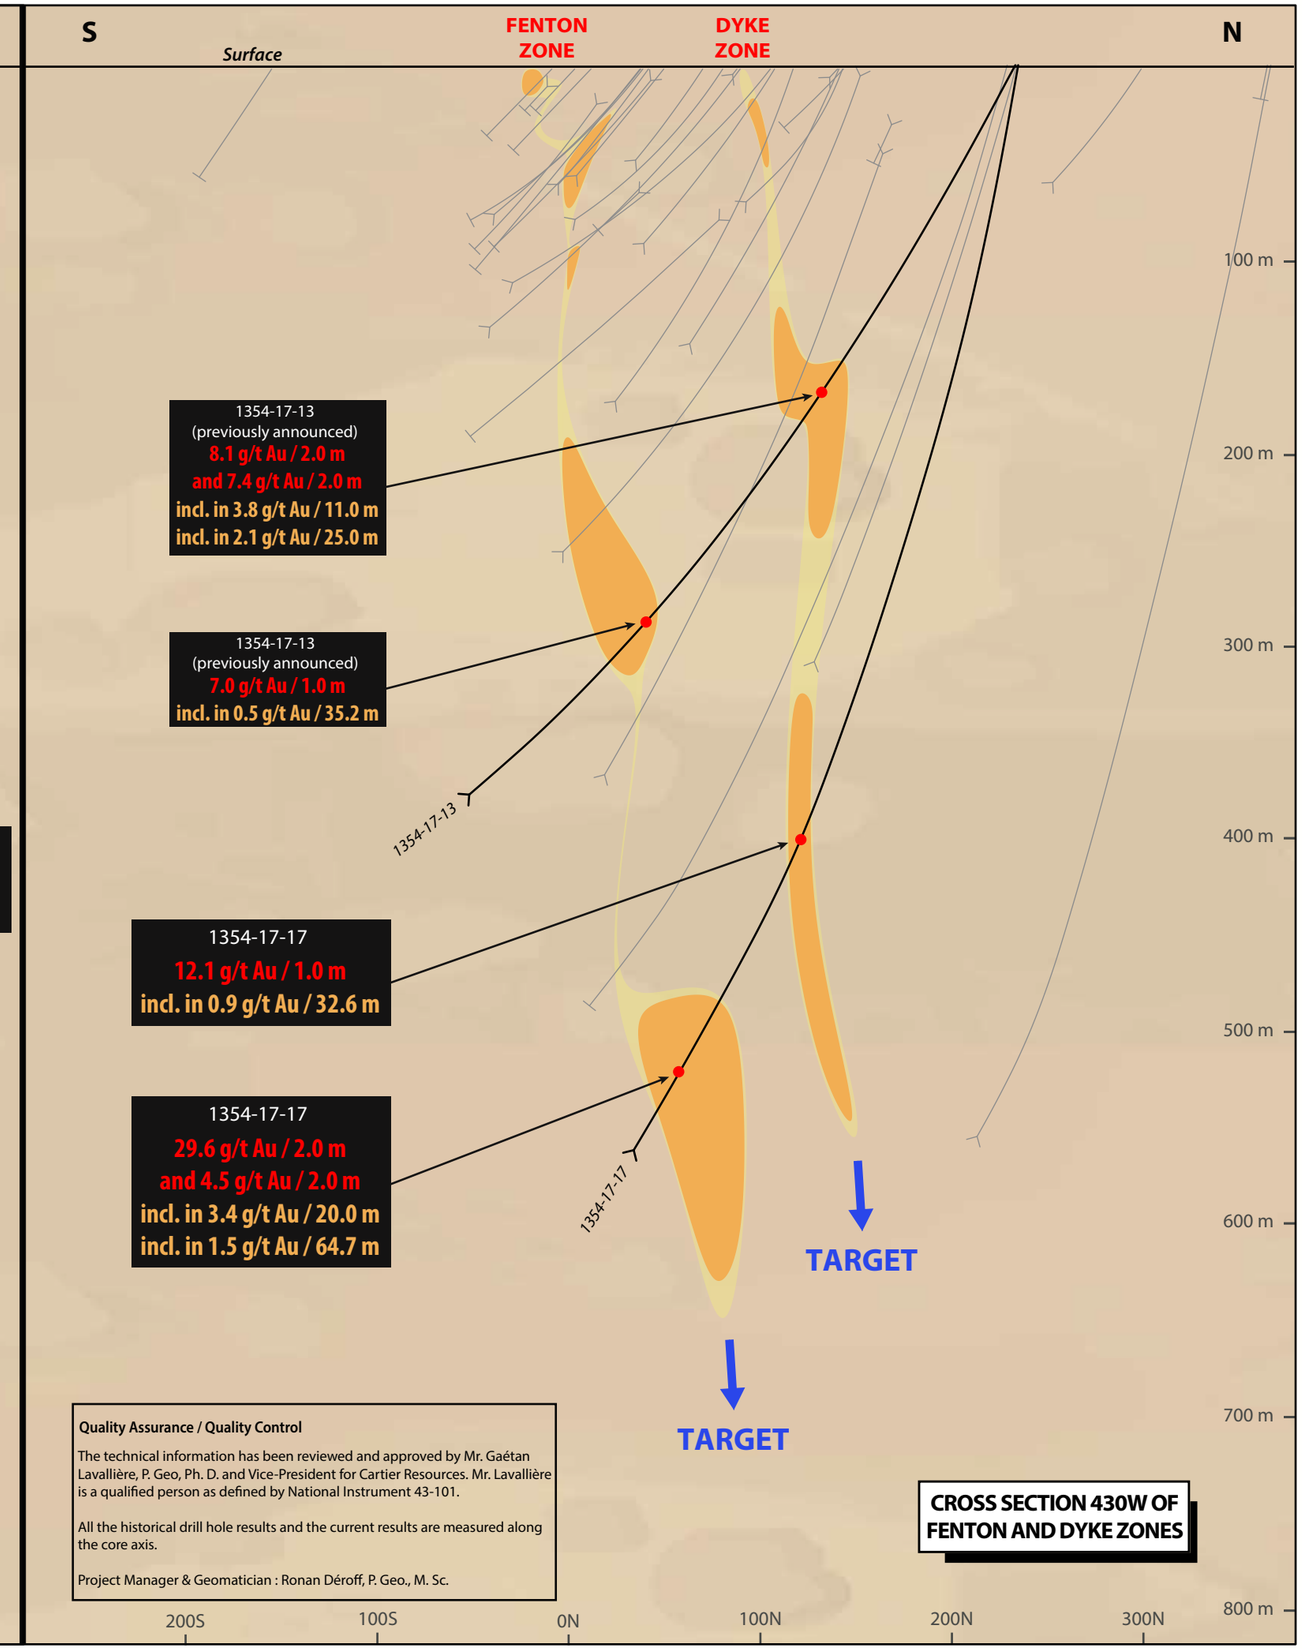
S
N
Surface
FENTON
ZONE
DYKE
ZONE
100 m
200 m
300 m
400 m
500 m
600 m
700 m
800 m
1354-17-13
(previously announced)
8.1 g/t Au / 2.0 m
and 7.4 g/t Au / 2.0 m
incl. in 3.8 g/t Au / 11.0 m
incl. in 2.1 g/t Au / 25.0 m
1354-17-13
(previously announced)
7.0 g/t Au / 1.0 m
incl. in 0.5 g/t Au / 35.2 m
1354-17-13
1354-17-17
12.1 g/t Au / 1.0 m
incl. in 0.9 g/t Au / 32.6 m
1354-17-17
29.6 g/t Au / 2.0 m
and 4.5 g/t Au / 2.0 m
incl. in 3.4 g/t Au / 20.0 m
incl. in 1.5 g/t Au / 64.7 m
1354-17-17
TARGET
TARGET
Quality Assurance / Quality Control
The technical information has been reviewed and approved by Mr. Gaétan Lavallière, P. Geo, Ph. D. and Vice-President for Cartier Resources. Mr. Lavallière is a qualified person as defined by National Instrument 43-101.
All the historical drill hole results and the current results are measured along the core axis.
Project Manager & Geomatician : Ronan Déroff, P. Geo., M. Sc.
CROSS SECTION 430W OF
FENTON AND DYKE ZONES
200S
100S
0N
100N
200N
300N