


W

E

5N Zone Longitudinal Section (Looking North) CHIMO MINE PROJECT

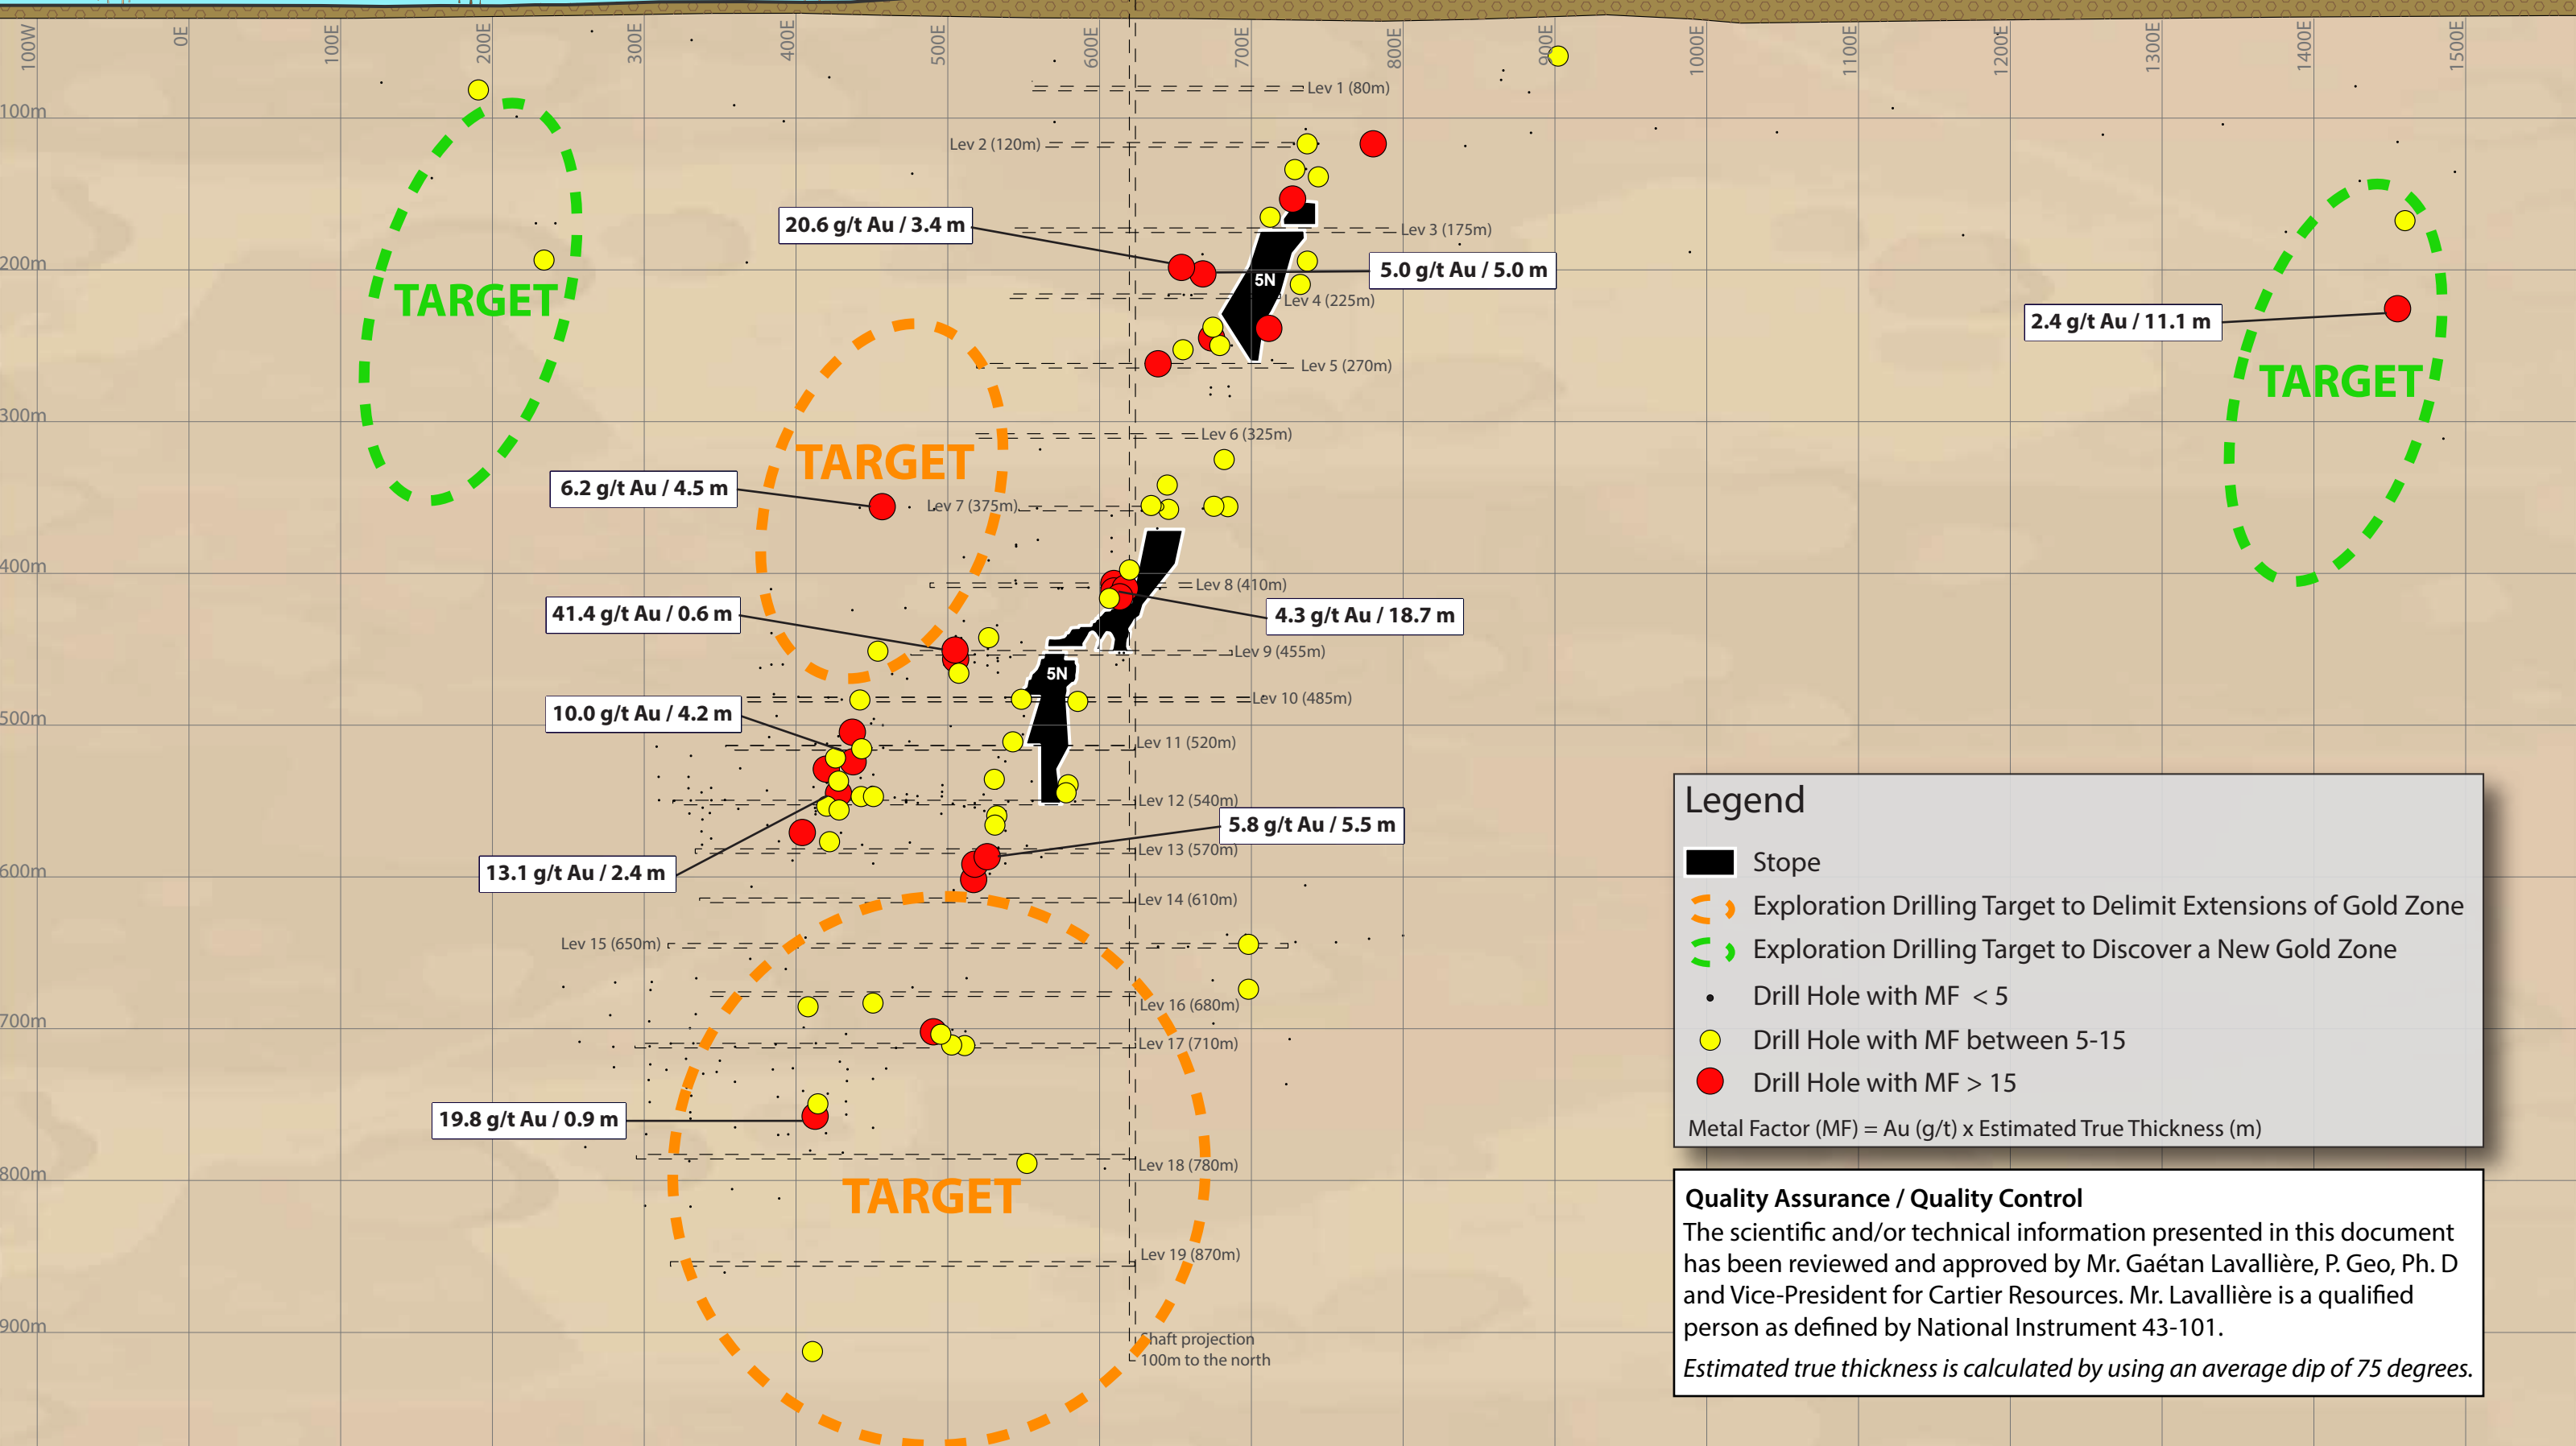

TARGET

TARGET

TARGET

20.6 g/t Au / 3.4 m

5.0 g/t Au / 5.0 m

2.4 g/t Au / 11.1 m

6.2 g/t Au / 4.5 m

41.4 g/t Au / 0.6 m

4.3 g/t Au / 18.7 m

10.0 g/t Au / 4.2 m

5.8 g/t Au / 5.5 m

13.1 g/t Au / 2.4 m

19.8 g/t Au / 0.9 m

TARGET

Legend

- Stope
 - Exploration Drilling Target to Delimit Extensions of Gold Zone
 - Exploration Drilling Target to Discover a New Gold Zone
 - Drill Hole with MF < 5
 - Drill Hole with MF between 5-15
 - Drill Hole with MF > 15
- Metal Factor (MF) = Au (g/t) x Estimated True Thickness (m)

Quality Assurance / Quality Control

The scientific and/or technical information presented in this document has been reviewed and approved by Mr. Gaétan Lavallière, P. Geo, Ph. D and Vice-President for Cartier Resources. Mr. Lavallière is a qualified person as defined by National Instrument 43-101.

Estimated true thickness is calculated by using an average dip of 75 degrees.