


W

E

6B Zone Longitudinal Section (Looking North) CHIMO MINE PROJECT

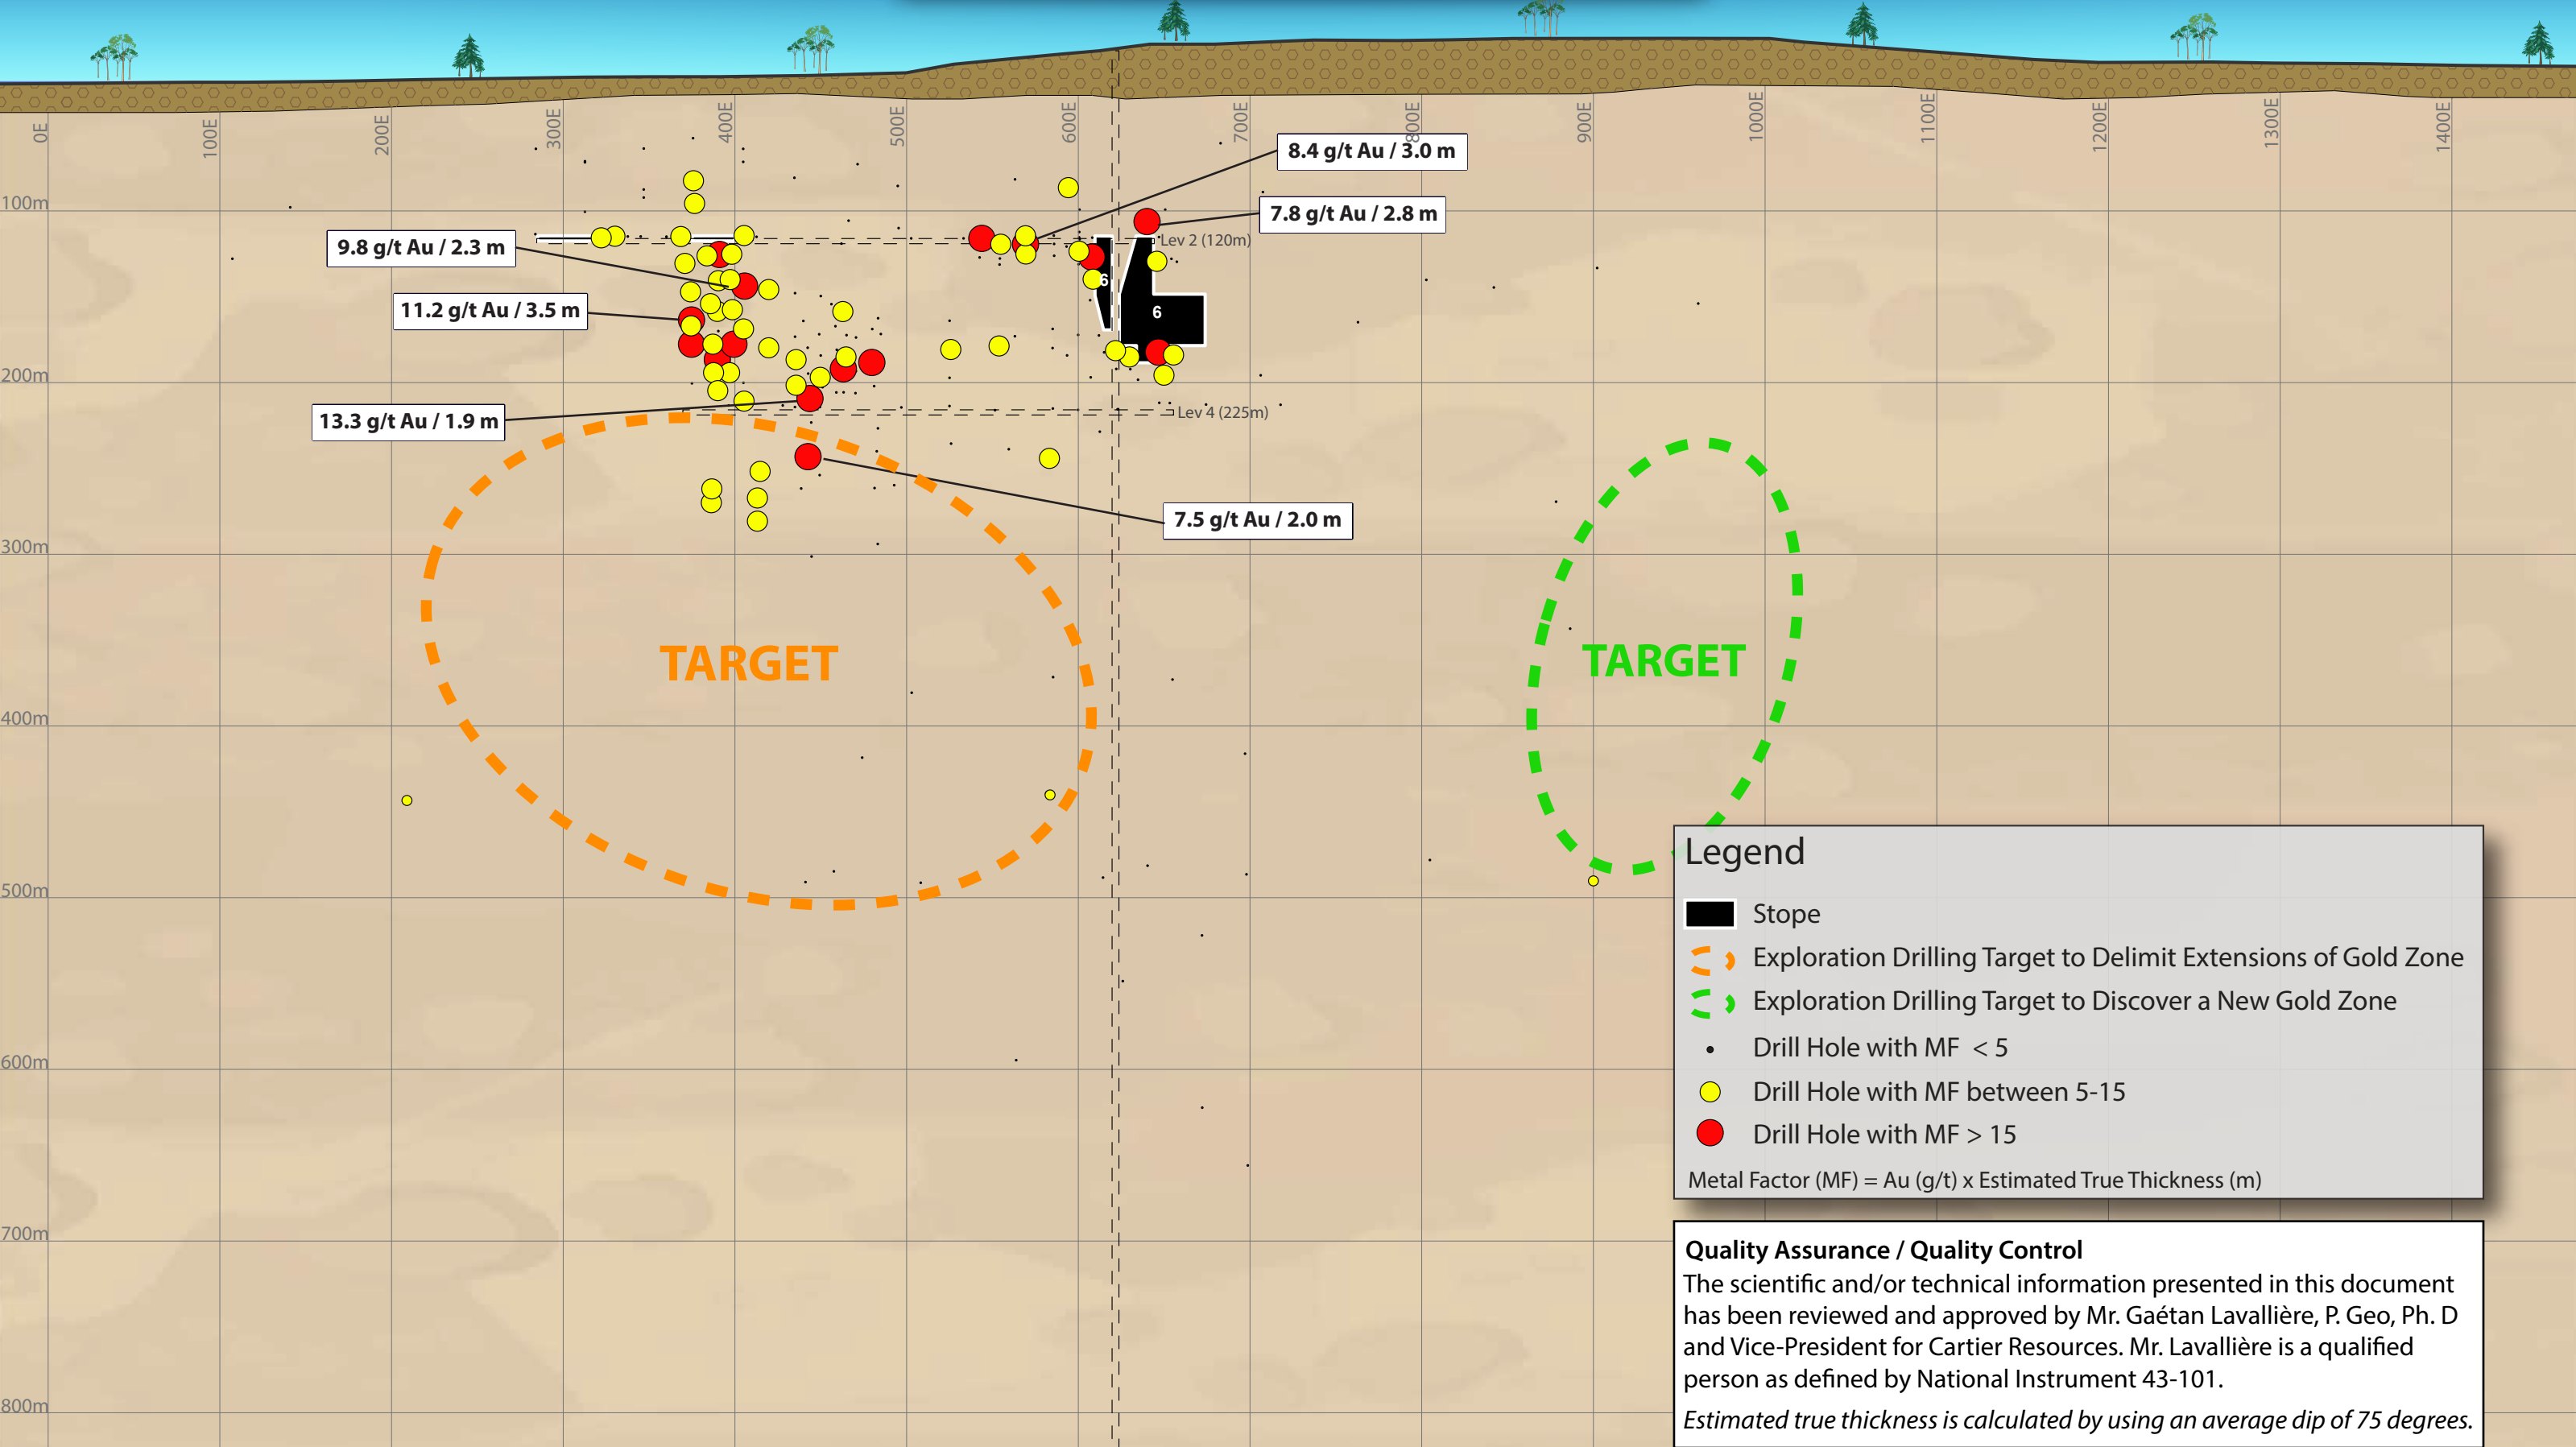

9.8 g/t Au / 2.3 m

11.2 g/t Au / 3.5 m

13.3 g/t Au / 1.9 m

8.4 g/t Au / 3.0 m

7.8 g/t Au / 2.8 m

7.5 g/t Au / 2.0 m

TARGET

TARGET

Shaft projection
1450m to the north

Legend

- Stope
- Exploration Drilling Target to Delimit Extensions of Gold Zone
- Exploration Drilling Target to Discover a New Gold Zone
- Drill Hole with MF < 5
- Drill Hole with MF between 5-15
- Drill Hole with MF > 15

Metal Factor (MF) = Au (g/t) x Estimated True Thickness (m)

Quality Assurance / Quality Control
 The scientific and/or technical information presented in this document has been reviewed and approved by Mr. Gaétan Lavallière, P. Geo, Ph. D and Vice-President for Cartier Resources. Mr. Lavallière is a qualified person as defined by National Instrument 43-101.
Estimated true thickness is calculated by using an average dip of 75 degrees.